





**Fitting Instructions for RSET05BK Adjustable Rear sets
Suzuki GSX-R600/750 (2006 - 2010)**

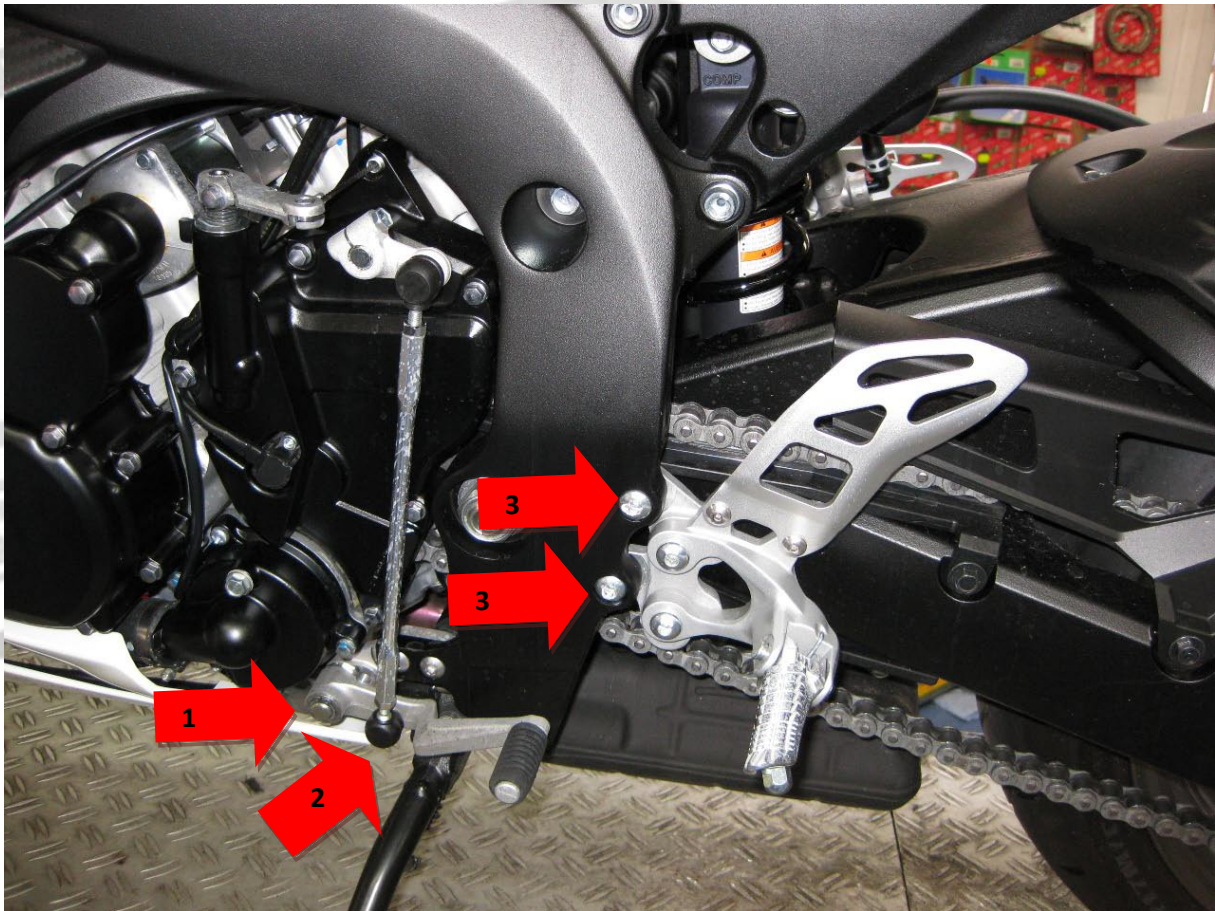


First remove the original gear lever (1), remove the lower connection (2) of the gear shaft and keep the original gear shaft on the bike. Then remove the original footrest.


Re-connect the original gear shaft with the R&G gear lever and then connect the gear lever into the original position. After that install the R&G Rear Set.

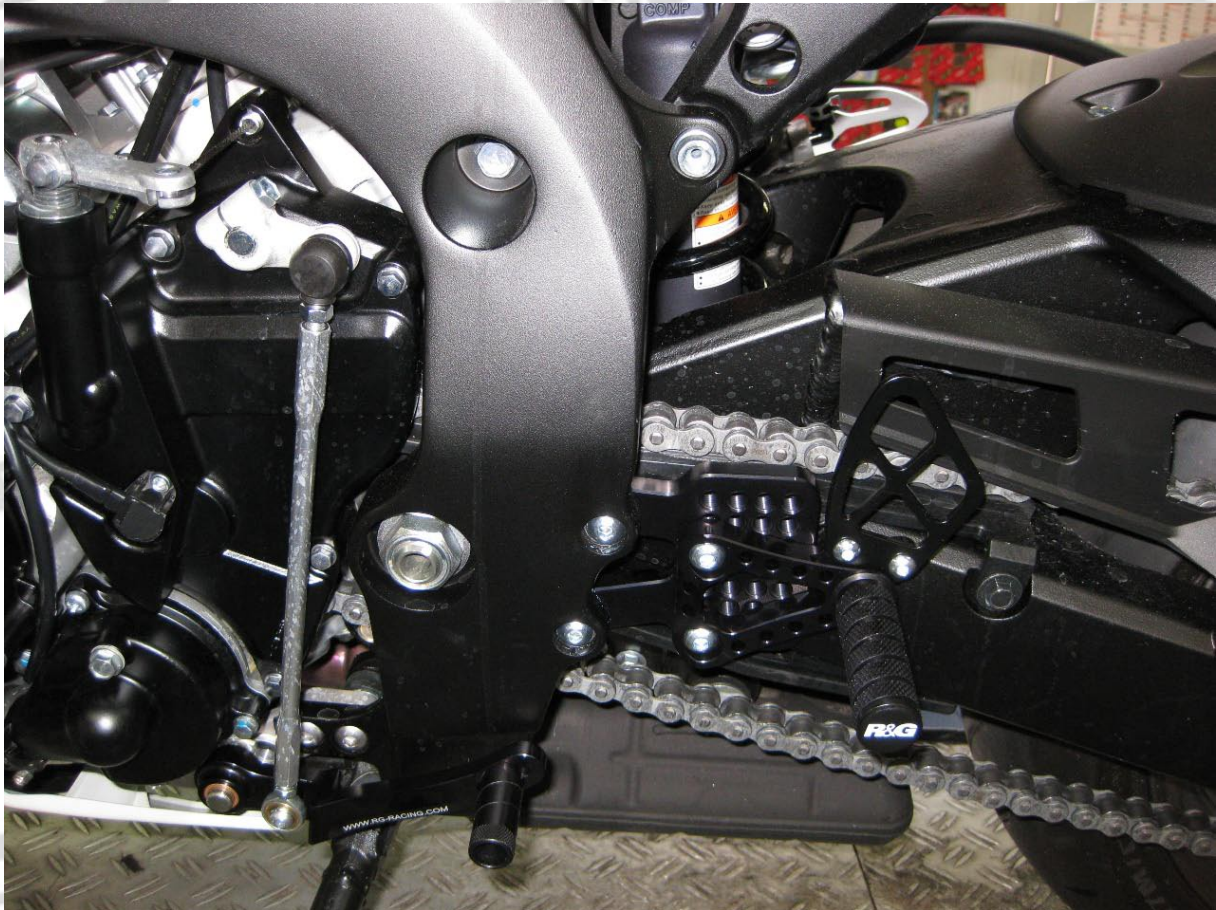

On the brake side, first remove the original footrest and disconnect the rear brake master cylinder.

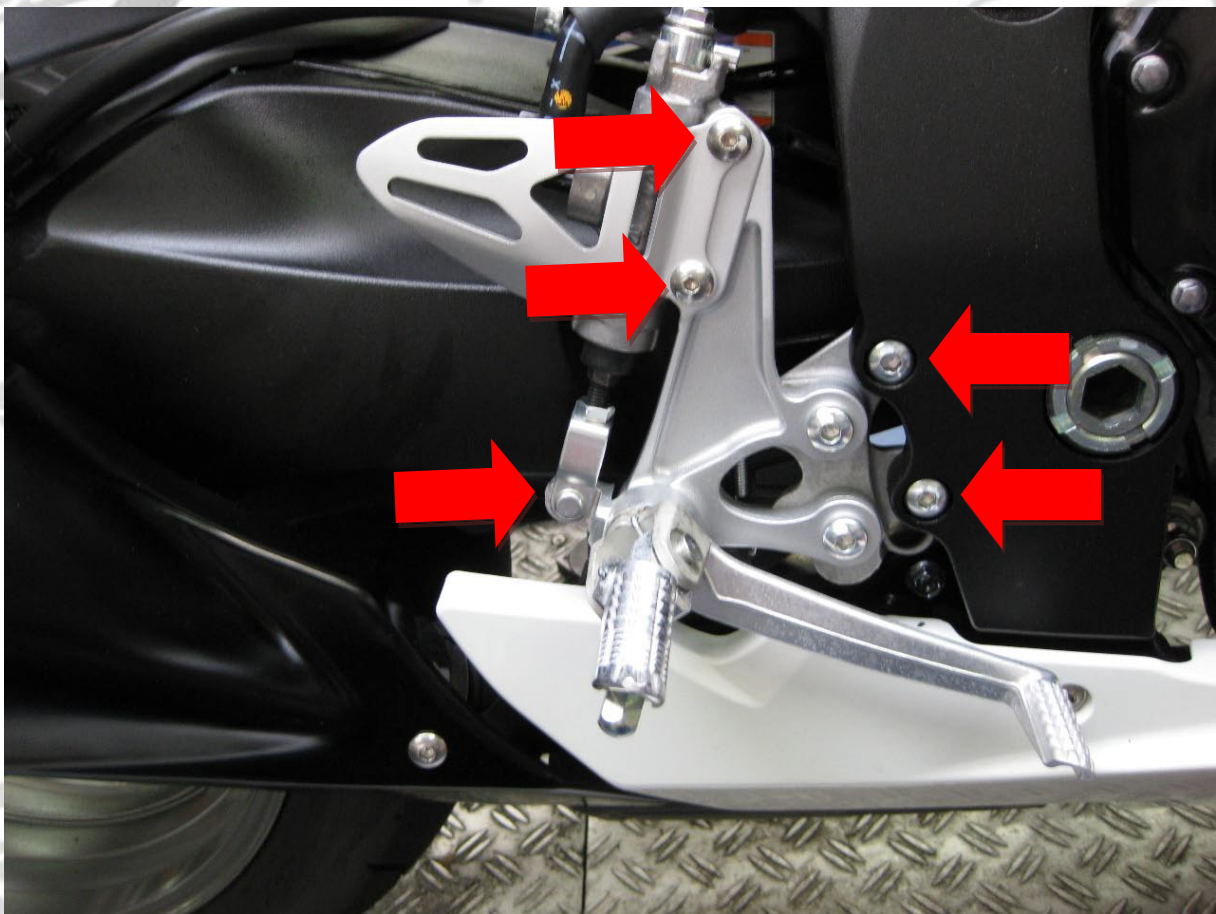


Having removed the original footrest, first connect the R&G Rear Set to the frame (1), but don't tighten it yet.

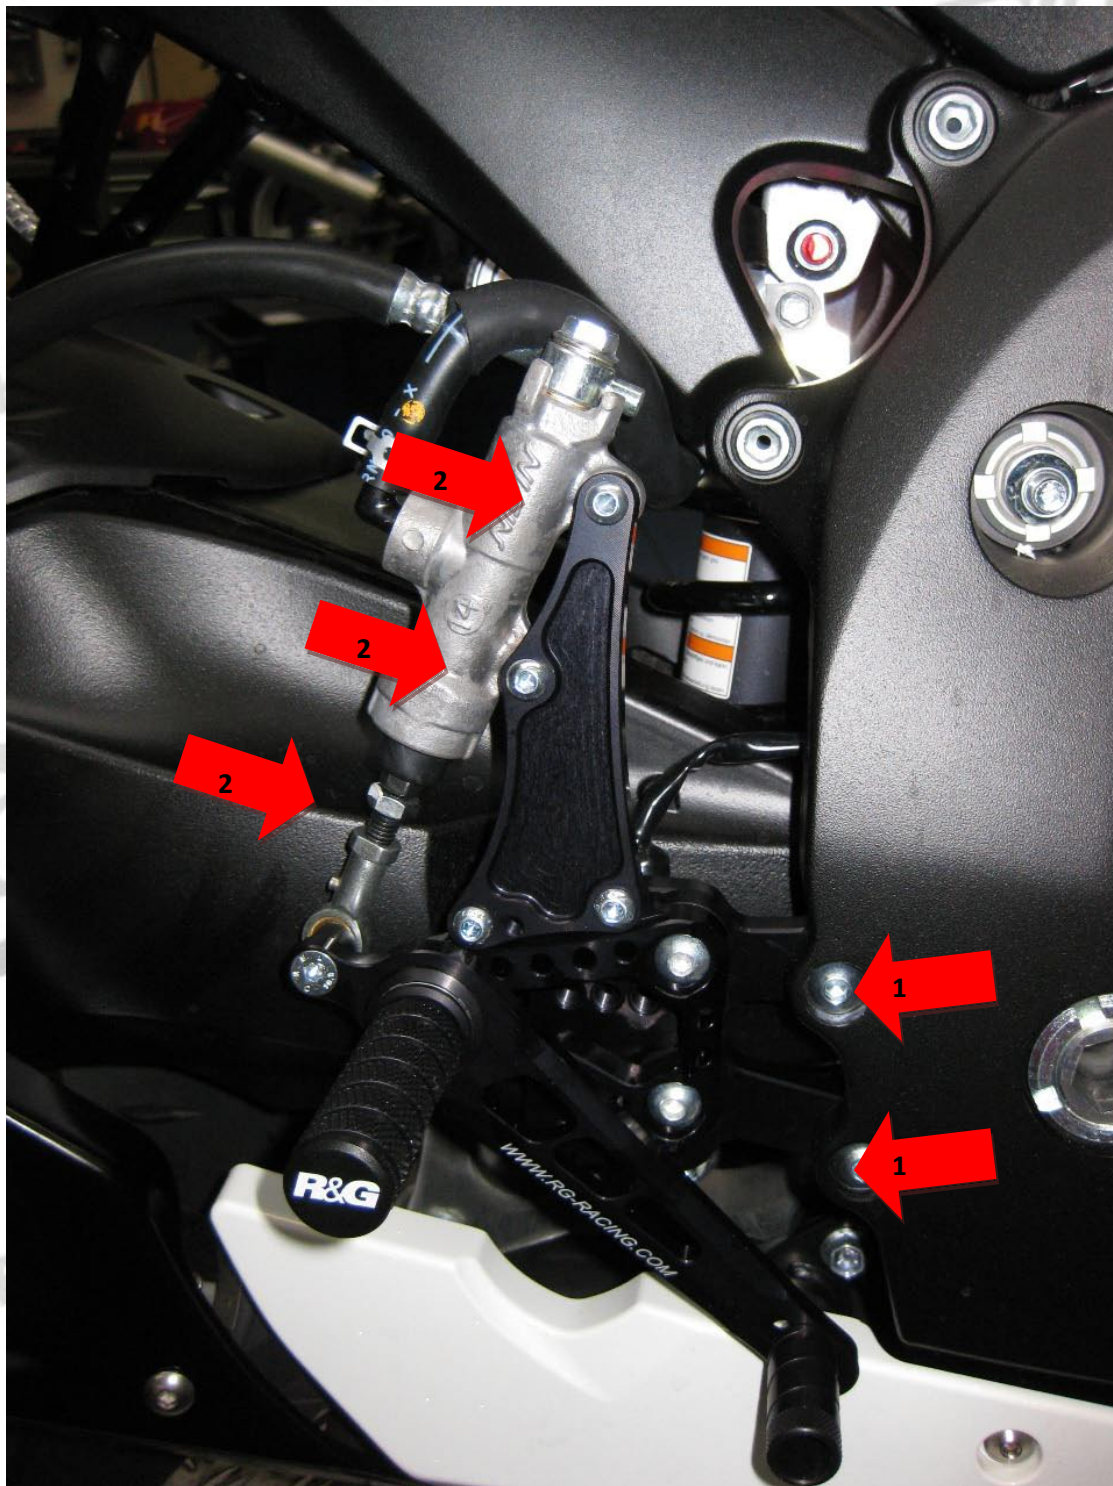

Then re-connect the rear brake master cylinder (2), find the right position and then tighten all screws.




**Instructions de montage pour RSET05BK Jeu arriere adaptable
Suzuki GSX-R600/750 (2006 - 2010)**

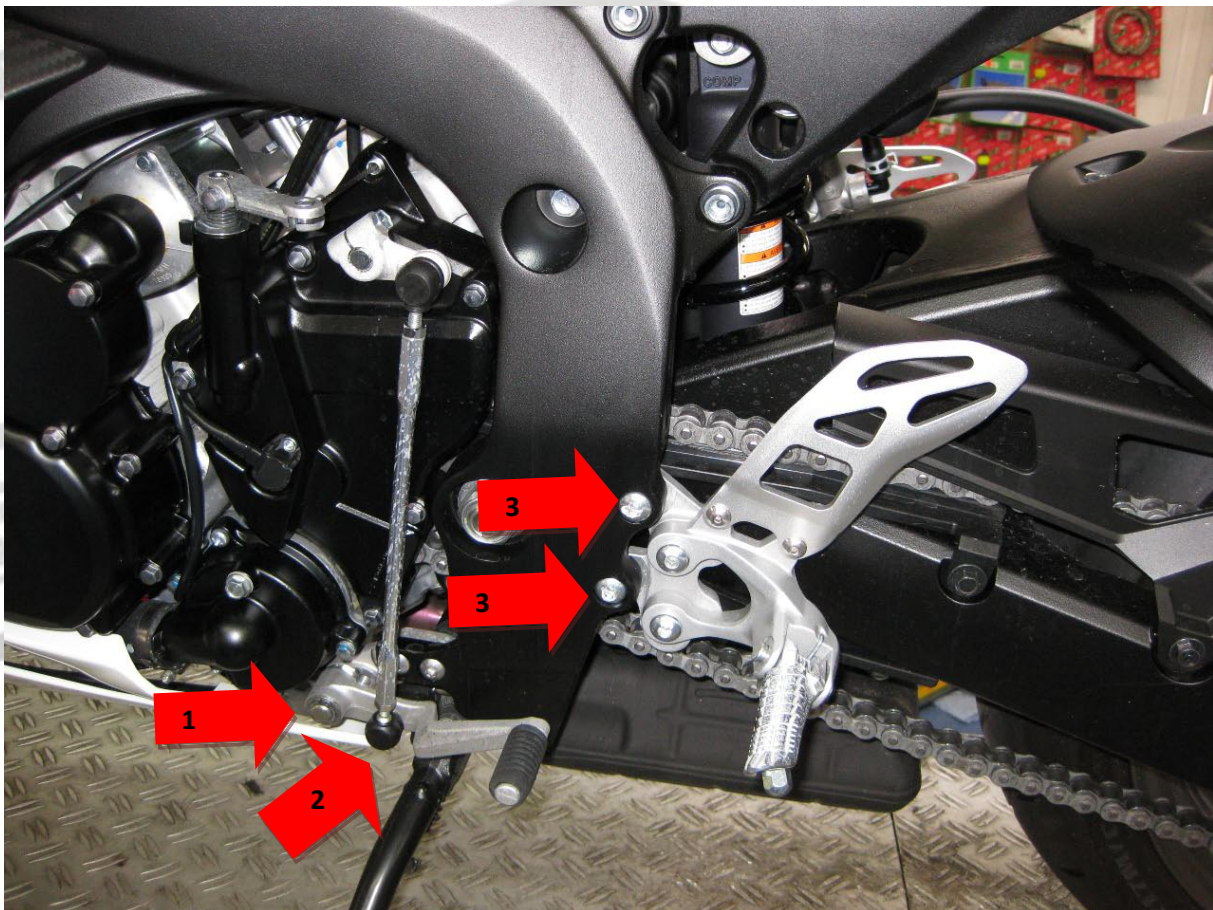


Commencer par retirer le levier de vitesses d'origine(1), retirer le raccord inferieur (2) de l'arbre de transmission et garder l'arbre de transmission sur la moto. Retirer ensuite le repose pied d'origine.


Connectez l'arbre de transmission d'origine avec l'arbre de transmission R&G Racing, puis connectez le levier de vitesses en position d'origine.

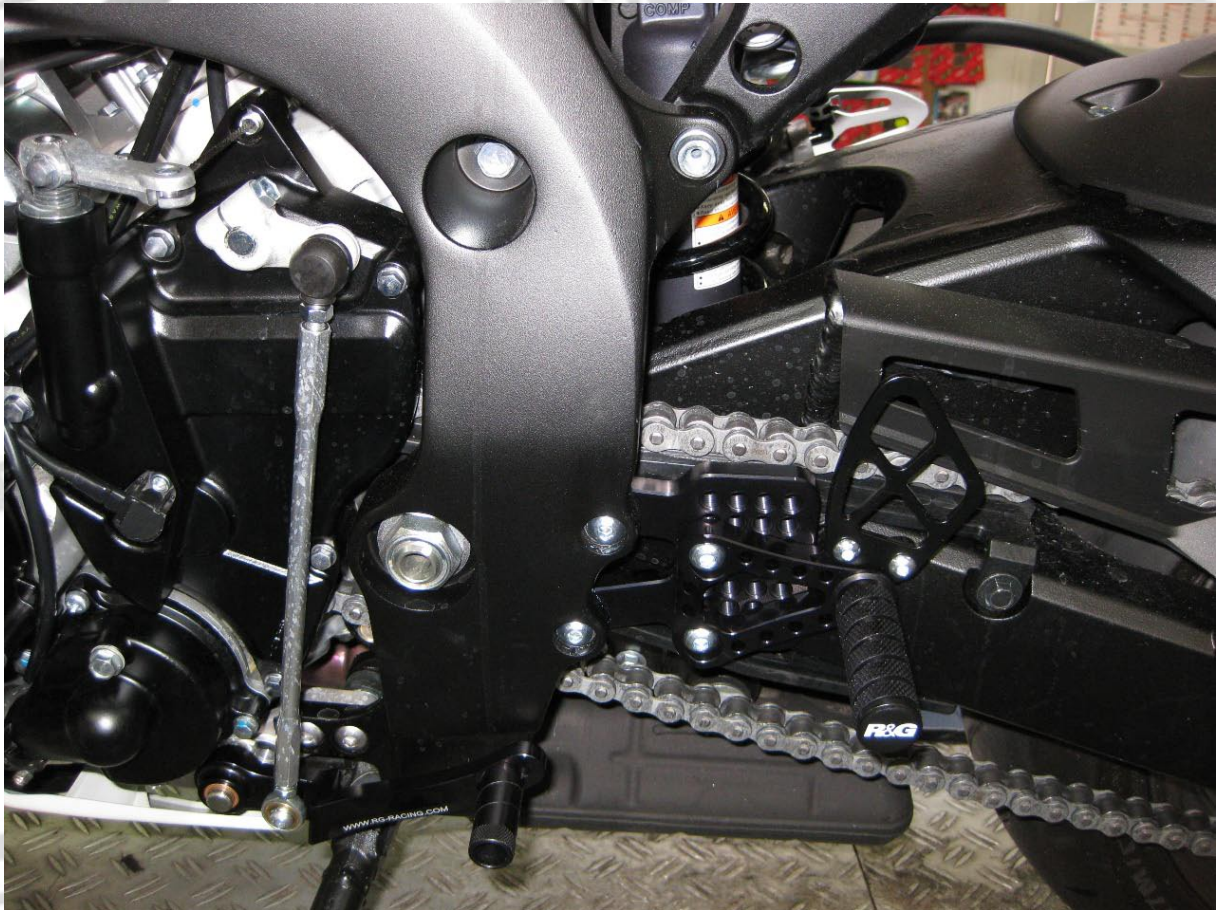

Sur le côté du frein, retirez d'abord le repose-pied d'origine et débrancher le cylindre de frein arrière maître.

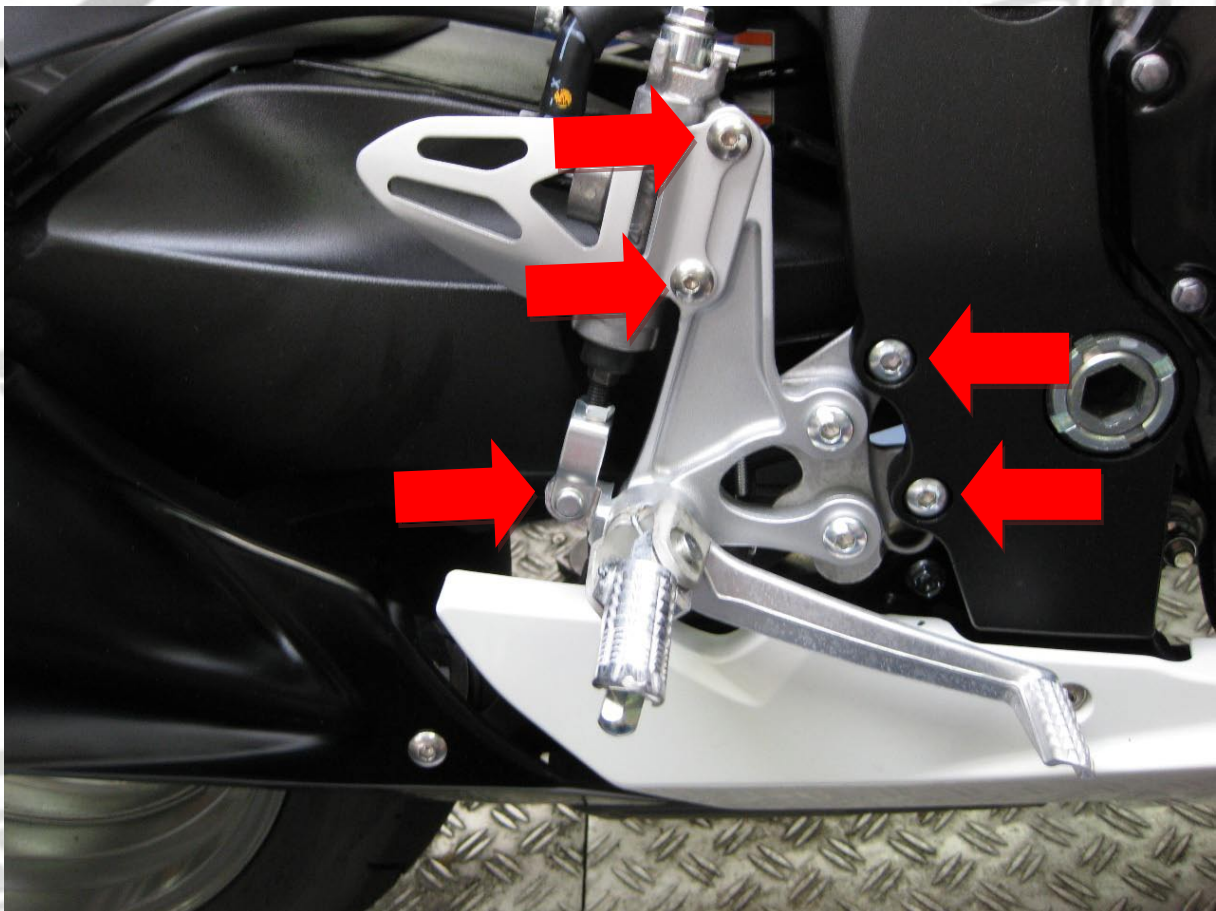

Après avoir retiré le repose-pied d'origine, tout d'abord connecter le R & G arrière Set au cadre (1), mais ne serrez pas encore.

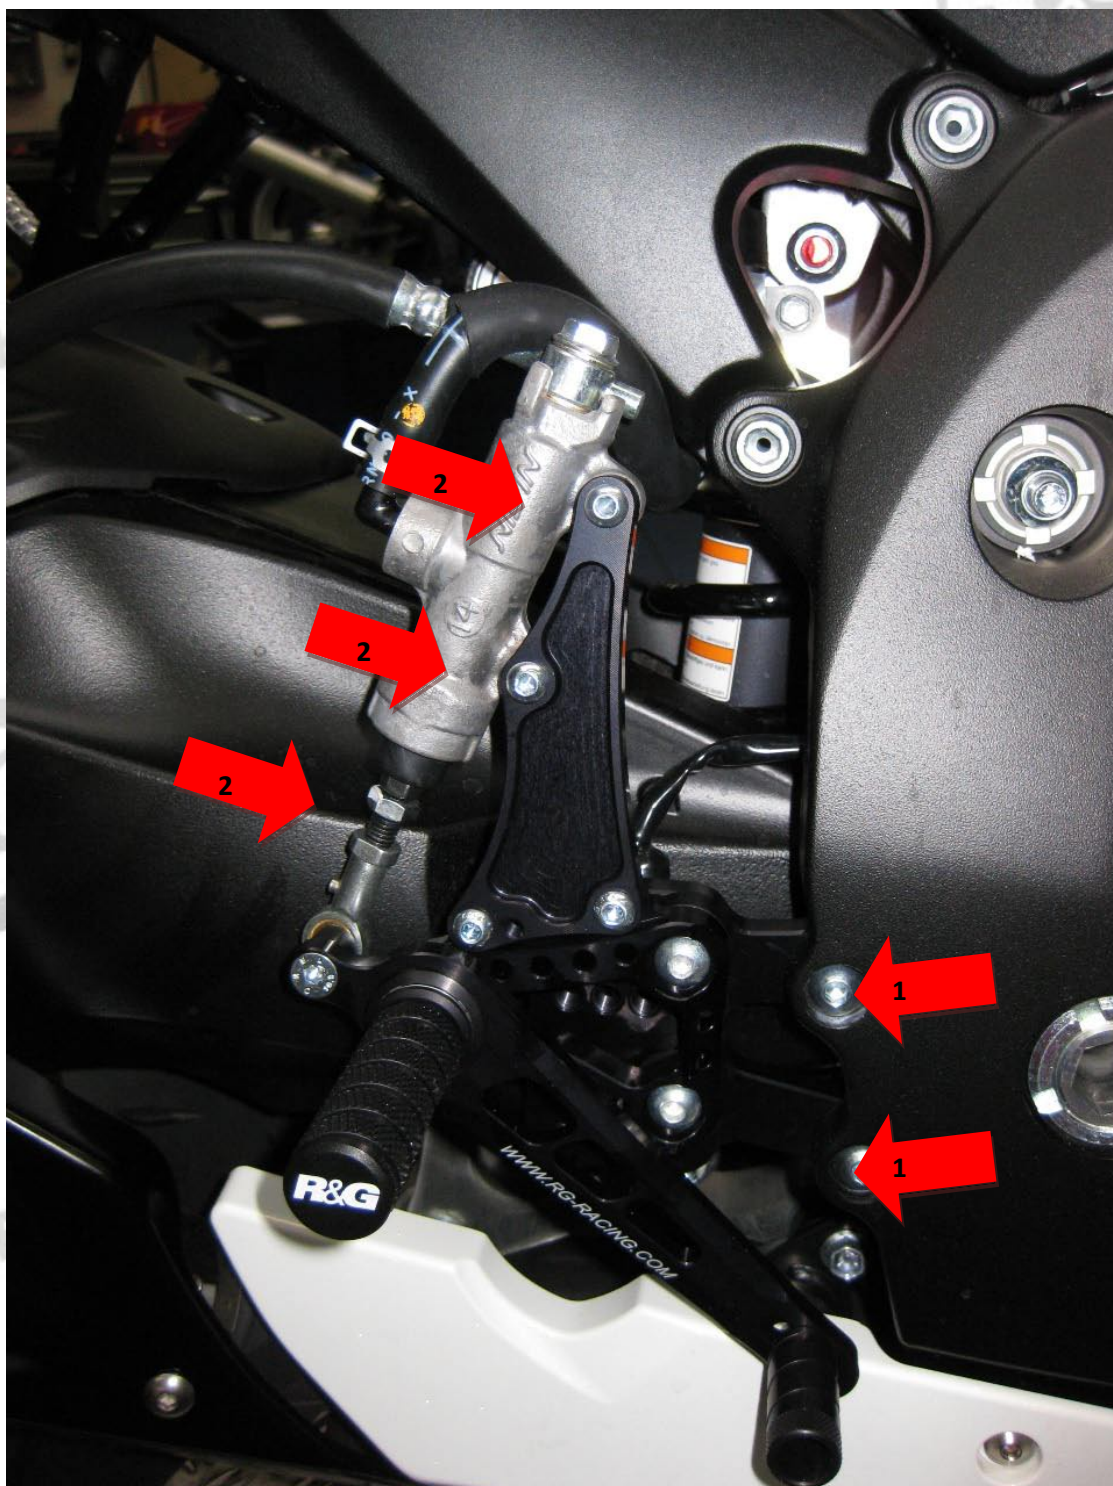

Rebrancher ensuite le cylindre de frein arriere maitre (2) et visser ensuite toutes les vis.